



Technical parameters	RFDEL-71B/230V	RFDEL-71B/120V
Supply voltage:	230 V AC / 50 Hz	120 V AC / 60 Hz
Apparent power:	1.1 VA	1.1 VA
Dissipated power:	0.8 W	0.8 W
Supply voltage tolerance:	+10 / -15 %	
Connection:	4-wire, with "NEUTRAL"	
Dimmed load:	R,L,C, LED, ESL	
Output		
Contactless:	2 x MOSFET	
Load capacity:	160 W*	80 W*
Control		
RF command from the transmitter:	866 MHz, 868 MHz, 916 MHz	
Range in open space:	up to 160 m	
Manual control:	button PROG (ON/OFF), external button	
Glow lamp connection:	NO	
Other data		
Operating temperature:	-20 up to + 35°C	
Storage temperature:	-30 up to +70°C	
Operating position:	any	
Mounting:	free at lead-in wires	
Protection:	IP 30 under normal conditions	
Overvoltage category:	III.	
Contamination degree:	2	
Terminals (CY wire, Cross-section):	4 x 0.75 mm ²	
Terminal length:	90 mm	
Dimensions:	49 x 49 x 21 mm	
Weight:	40 g	
Related standards:	EN 607 30-1 ED.2	


* Due to the huge amount of type of light sources, the maximum load depends on internal construction of dimmable LED and ESL bulbs and their power factor $\cos \varphi$, capacity for power factor $\cos \varphi=1$. The power factor of dimmable LEDs and ESL bulbs ranges from $\cos \varphi = 0.95$ up to 0.4. An approximate value of maximum load may be obtained by multiplying the load capacity of the dimmer by the power factor of the connected light source.

You can find the list of dimmable light sources here:



- The universal built-in dimmer is used to regulate light sources:
 - R – classic lamps
 - L – halogen lamps with wound transformer
 - C – halogen lamps with electronic transformer
 - ESL – dimmable energy-efficient fluorescent lamps
 - LED – LED light sources (230 V).
- They can be combined with detectors, controllers, iNELS RF Control or system components.
- The BOX design lets you mount it right in an installation box, a ceiling or light cover.
- 6 light functions - smooth increase or decrease with time setting 2 s-30 min.
- When switched off, the set level is stored in the memory, and when switched back on, it returns to the most recently set value.
- Thanks to setting the min. brightness by potentiometer, you will eliminate flashing of the LED and ESL light sources.
- The universal dimmer may be controlled by up to 25 channels (1 channel represents 1 button on the controller).
- Connection of the existing button on the control input „S“ enables combination of wireless control with classic (wired) control.
- The programming button on the controller is also used for manual control of the output.
- Memory status can be pre-set in the event of a power failure.
- For components it is possible to set the repeater function via the RFAF / USB service device.
- Range up to 160 m (in open space), if the signal is insufficient between the controller and unit, use the signal repeater RFRP-20 or protocol component RFIO² that support this feature.
- Communication frequency with bidirectional protocol iNELS RF Control² (RFIO²).

Device description

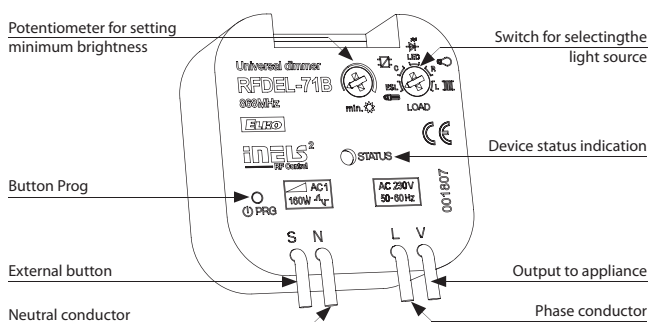

Function

For more information see p. 65.

Connection

